



**VAN DER VALK**



# ValkAce

The new standard for  
tiled pitched roofs!

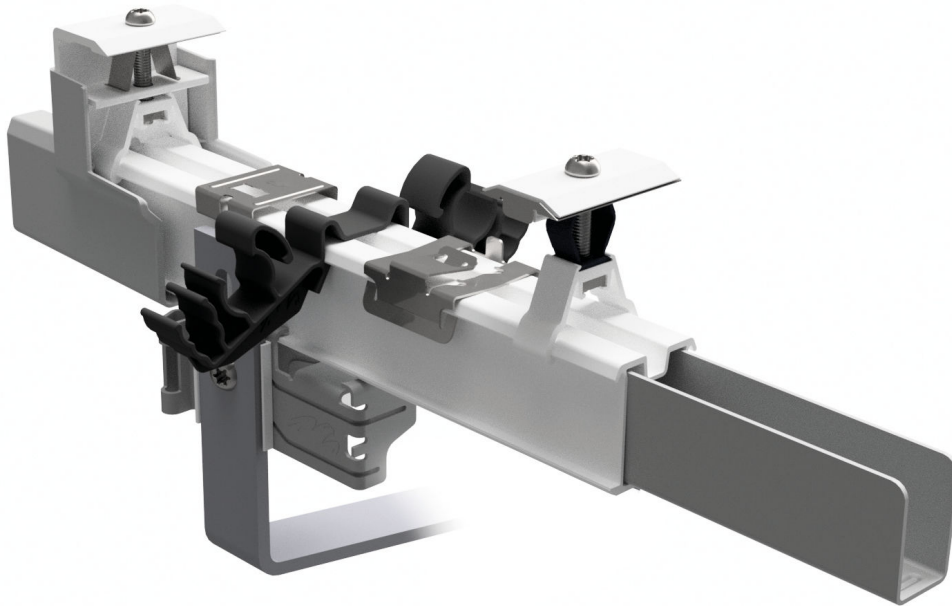


## Applications

- ✓ Mounting system for tiled pitched roofs.
- ✓ Standard profile length ideal for 1134 mm wide panels.
- ✓ 25 – 30 – 35 – 40 mm frame height.

## Features

- ✓ Single roof hook for horizontal and vertical profile mounting.
- ✓ Easy clip-on panel clamps and slide-in coupling.
- ✓ Only one tool is needed (T30).
- ✓ Clamps and profiles in high-quality aluminium, ValkAce bracket in Magnelis® steel.
- ✓ End cap can accommodate excessive profile length.
- ✓ Also black clamps available.

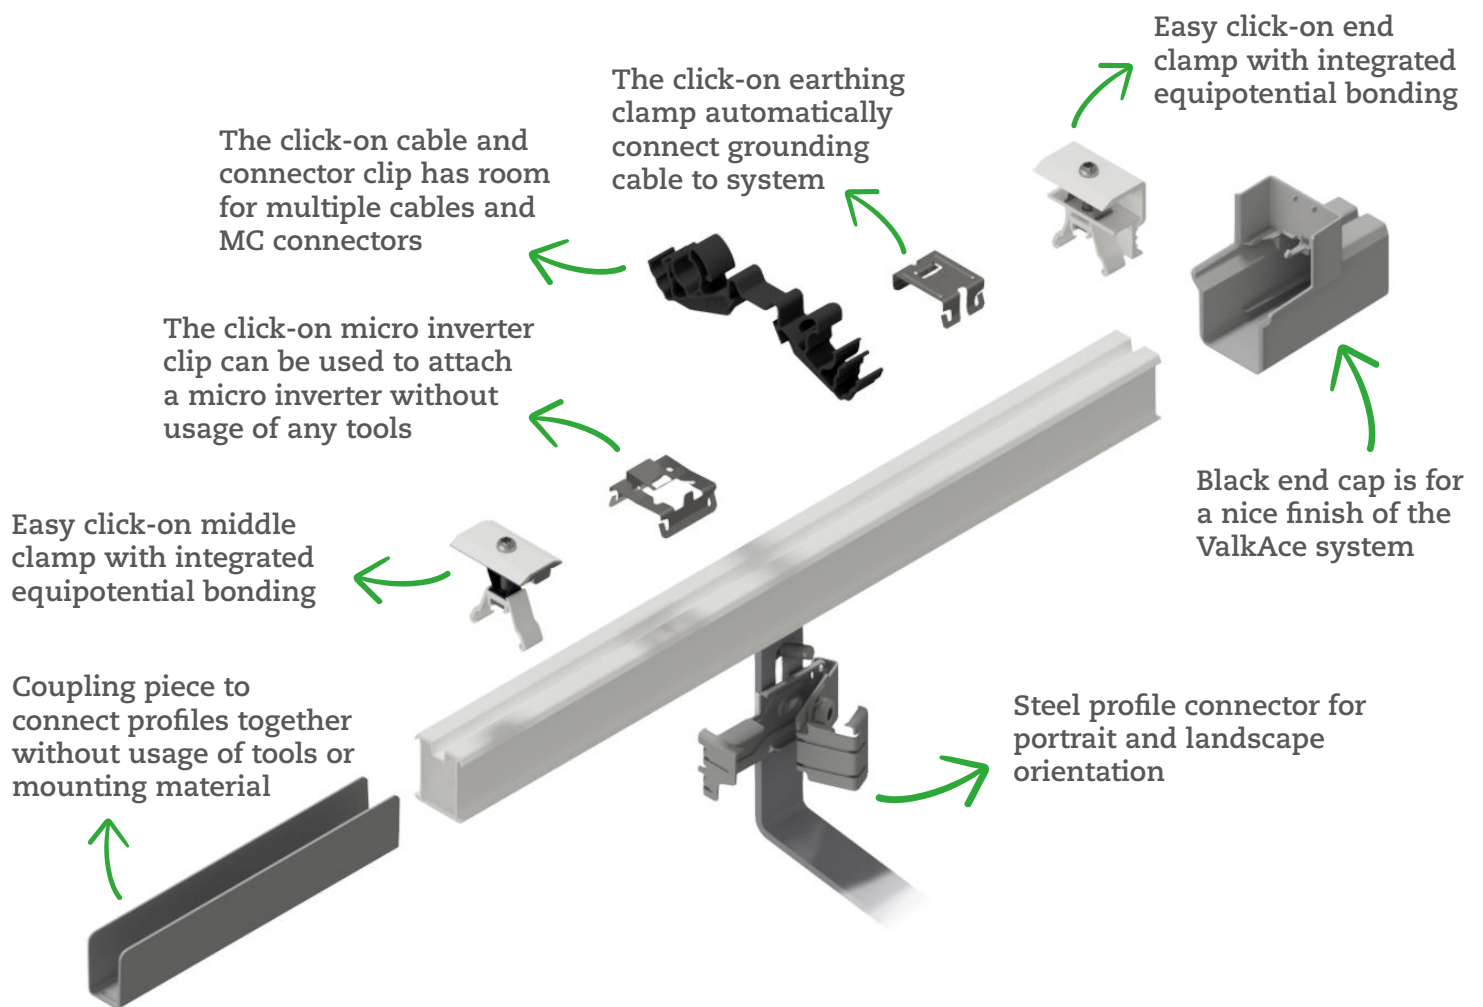

## Reliability and sustainability

- ✓ Designed and calculated according to Eurocode standards EN 1990, EN 1991-1-3, EN 1991-1-4 and NEN 7250.
- ✓ Wind tunnel tested by Peutz.
- ✓ All components can be disassembled for re-use or recycling at end of usage.

## Key benefits

- ✓ Super fast installation and easy height adjustment.
- ✓ Automatic electrical bonding of metal parts and panels.
- ✓ Clip-on cable management and grounding clamp.

**For more information on ValkAce,  
please contact Van der Valk Solar Systems:**

☎ [+31\(0\)174 254 999](tel:+310174254999)

✉ [sales@valksolarsystems.nl](mailto:sales@valksolarsystems.nl)